

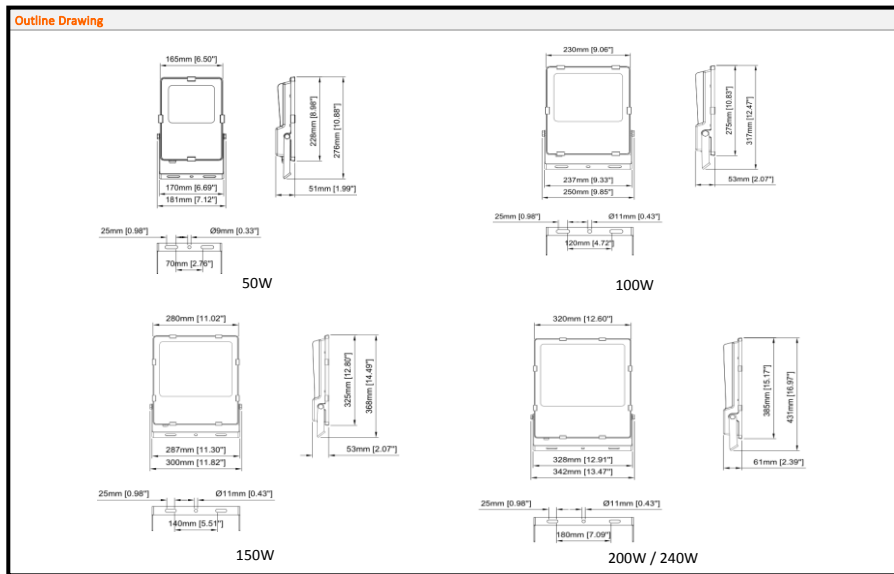
		<p>Features</p> <ul style="list-style-type: none"> >> The compact design of structure save the shipping cost at most maintaining the superb heat dissipation ability. >> Adjustable projecting angle, easy to dismantle and maintain. >> More widely usage fields. >> VDE/UL listed 3*1.0mm² rubber cable with cold-pressed terminal. >> .ies/.ldt files are available. 					
							
Model Number	VENETO-BS50-110N-HB2	VENETO-BS100-110N-HB2	VENETO-BS150-110N-HB2	VENETO-BS200-110N-HB2	VENETO-BS240-110N-HB2		
Power Consumption	50w	100w	150w	200w	240w		
Luminous Flux @5000K	6000lm	12000lm	18000lm	24000lm	28800lm		
Light efficiency						120 lm/W	
Beam angle						110deg	
RA						70	
IK						07	
IP						65	
Operating temperature						-20°C to + 45°C	
Color temperature						5000K	
Input surge protection	50W L/N 2KV, L/N-PE 2KV	100W L/N 2KV, L/N-PE 2KV	150W L/N 4KV, L/N-PE 2KV	200W L/N 4KV, L/N-PE 2KV	240W L/N 4KV, L/N-PE 2KV		
Power Supply	Chinese TUV listed driver (50W-240W)						
Type of Driver	Non-isolated						
Driver Efficiency	90%						
Power Factor	≥0.9						
THD	≤15%						
Frequency	50/60Hz						
Input Voltage	100-277VAC						
Material	Structure	ADC12					
	Bracket	SPCC					
	Finish	Powder coated					
	Lens	Tempered glass/PC lens					
Fixture Color	Matte Black						
Protection Class	Class I						
Alignment	0° ~ 270°						
Mounting Option	Ground /Wall Mounted						
Dimmable*	1-10V dimming control, DALI						
Intelligent Control	PIR sensor						
Certificate	CE						
Light Distribution Curve							
 <p style="text-align: center;">110deg</p>							

*Dimmable upon request



Packing Information	Item	Luminaire Net Weight	Packing info	Dimension (inner box)
	50w	1.12kg	1pc/ inner box	L190*W80*H285
	100w	1.91kg	1pc/ inner box	L360*W285*H100
	150w	2.78kg	1pc/ inner box	L425*W340*H115
	200w	4.87kg	1pc/ inner box	L485*W380*H120
	240w	4.87kg	1pc/ inner box	L485*W380*H120