		Features >>This product is with elegant appearance and high efficiency, high configuration, long lifespan and also high temperature resistance. >> various optics for options. >> incremental 30deg tick marks are provided in the casting of a single hex head bolt to allow for precise aiming and to facilitate the alignment of multiple luminaires. >>with glue-fixed tempered glass			
Model Number	VENETO-SR100-110N-FR	VENETO-SR150-110N-FR	VENETO-SR200-110N-FR	VENETO-SR250-110N-FR	VENETO-SR300-110N-FR
Power Consumption	100w	150w	200w	250w	300w
Luminous Flux @5000K	12500lm	18750lm	25000lm	31250lm	37500lm
Light efficiency	125 lm/W				
Beam angle	110deg				
RA	70				
IK	08				
IP	66				


LED Type	Tiandian	
Power Supply	Sosen	
Type of Driver	Non-isolated	
Driver Efficiency	≥ 90 %	
Power Factor	≥ 0.95	
T H D	≤ 10 %	
Frequency	50 / 60 H z	
Input Voltage	100 - 277 V A C	
Input surge protection	L - N: 4KV; L/N - G N D: 4KV	
Color Rendering Index	Ra70 (Ra80 optional)	
M a t e r i a l	Structure	Die-casting
	Bracket	SPCC
	Finish	Powder coated
	Lens	PC
Fixture Color	Aluminum gray	
Protection Class	Class I	
Alignment	0° ~ 270°	
Operating Temperature	-30°C to +45°C	
Mounting Option	Ground /Wall Mounted	
Dimmable*	1-10V dimming control; DALI	
Intelligent Control	Occupancy sensor	

*Dimmable upon request


LIGHT DISTRIBUTION CURVE



OUTLINE DRAWING

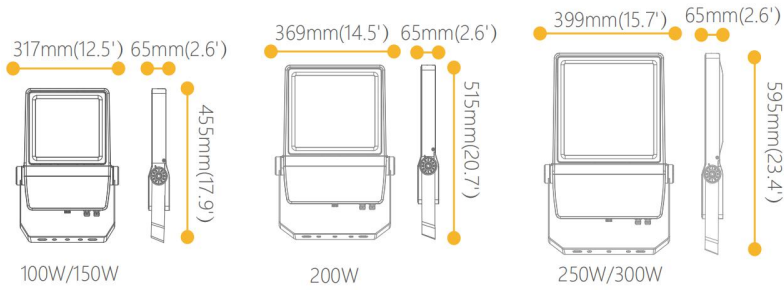

ACCESSORIES

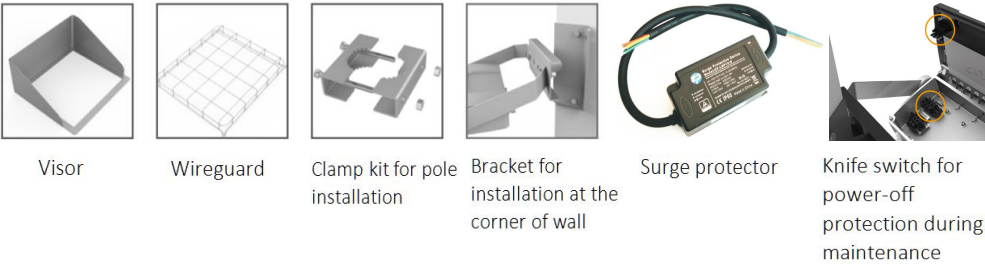

Item	Luminaire Net Weight	Packing info	Dimension (inner box)
100W	4.0kg	1pc per inner box	L340*W100*H495
150W	4.0kg	1pc per inner box	L340*W100*H495
200W	5.9kg	1pc per inner box	L380*W100*H555
250W	7.2kg	1pc per inner box	L410*W100*H635
300W	7.2kg	1pc per inner box	L410*W100*H635

Remark: The specification is subject to change without notice, please kindly contact us prior to ordering.