

BYY-K

Explosion Proof Exit Sign



Features

- Zone 1&2, Zone 21&22
 - Die-cast aluminum body with baked epoxy powder coat finish for durability and corrosion resistance.
 - Ultra-bright LED light source, service life is up to 50,000 hours.
 - Designed with test buttons, convenient for regularly maintenance.
 - The light fitting is designed with a main power indicator, failure and charging indicator, to the using status.
 - Equipped with an explosion-proof buzzer with a 65dB-85dB voice. When the product is in fault status, the buzzer will work 1-3s every minute to remind the user to maintain the product.
-

Compliance

ATEX Standard:

ATEX


CE

RoHS

Technical Parameter

Specification	
European (ATEX)	CE 1282 Ex II 2G Ex d IIC Gb
Gas and Dust	CE 1282 Ex II 2D Ex tb Db
IP Degree	IP66
Input voltage	220-240VAC, 50-60Hz
Power consumption (W)	3
Back-up Battery	3 Hours
Entries	NPT3/4"
Size (mm)	166*375*65
Weight (kg)	3.25kg
Mounting Styles	Ceiling; Wall; Base Mount

Dimension

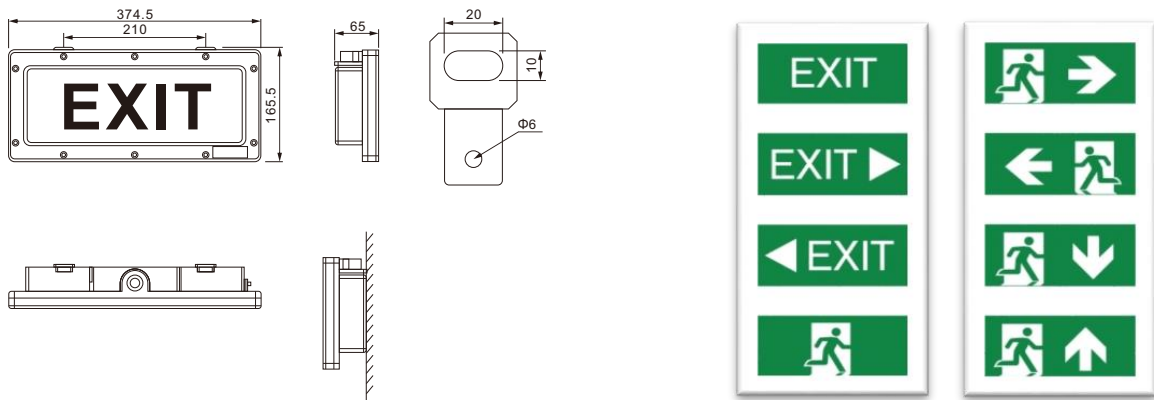

Measurement unit: mm

Model No.	Net Weight (Product)	Product Dimension
BYY-K	3.25kg	166x375x65 mm